

UNCLASSIFIED

AD NUMBER	
ADA800604	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to DoD only; Administrative/Operational Use; MAR 1946. Other requests shall be referred to National Aeronautics and Space Administration, Washington, DC. Pre-dates formal DoD distribution statements. Treat as DoD only.	
AUTHORITY	
NACA Technical Publications Index dtd 31 Dec 1947; NASA TR Server website	

THIS PAGE IS UNCLASSIFIED


Reproduction Quality Notice

This document is part of the Air Technical Index [ATI] collection. The ATI collection is over 50 years old and was imaged from roll film. The collection has deteriorated over time and is in poor condition. DTIC has reproduced the best available copy utilizing the most current imaging technology. ATI documents that are partially legible have been included in the DTIC collection due to their historical value.

If you are dissatisfied with this document, please feel free to contact our Directorate of User Services at [703] 767-9066/9068 or DSN 427-9066/9068.

**Do Not Return This Document
To DTIC**

Reproduced by
AIR DOCUMENTS DIVISION

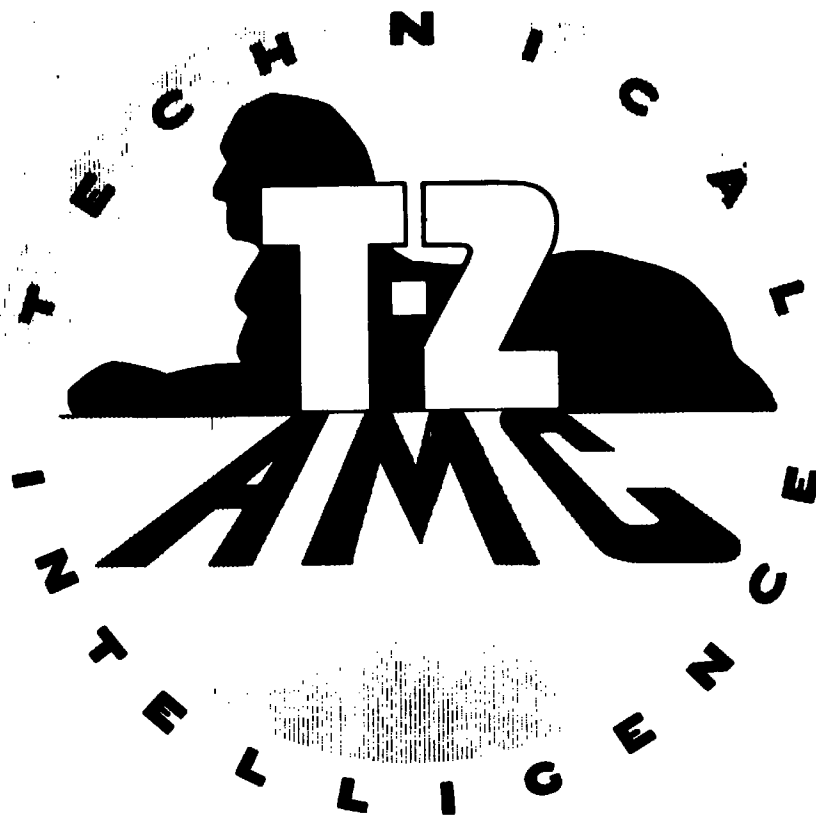

HEADQUARTERS AIR MATERIEL COMMAND

WRIGHT FIELD, DAYTON, OHIO

The
U.S. GOVERNMENT

IS ABSOLVED

FROM ANY LITIGATION WHICH MAY

ENSUE FROM THE CONTRACTORS IN -

FRINGING ON THE FOREIGN PATENT

RIGHTS WHICH MAY BE INVOLVED.

REEL - C

151

A.T.I.

6477

D52.1/208
REPUBLIC
ACR No. L6B21

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ATI No. 6477

WARTIME REPORT

ORIGINALLY ISSUED

March 1946 as
Advance Confidential Report L6B21

FLIGHT INVESTIGATION AT HIGH SPEEDS OF PROFILE DRAG

OF WING OF A P-47D AIRPLANE HAVING PRODUCTION

SURFACES COVERED WITH CAMOUFLAGE PAINT

By John A. Zalovecik and Fred L. Daum

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

FILE COPY

Air Documents Division, T-2
AMC, Wright Field
Microfilm No.
RC-151 F 6477

RETURN TO
NACA
Special Documents Branch (TSRWF)
Wright Field, Dayton, Ohio
Air Documents Division - Intelligence (T-2)
Wright Field, Dayton, Ohio.

WASHINGTON

RECEIVED
JUL 21 1947

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

NACA ACR No. L6B21

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ADVANCE CONFIDENTIAL REPORT

FLIGHT INVESTIGATION AT HIGH SPEEDS OF PROFILE DRAG
OF WING OF A P-47D AIRPLANE HAVING PRODUCTION
SURFACES COVERED WITH CAMOUFLAGE PAINT

By John A. Zaloveik and Fred L. Daum

SUMMARY

A flight investigation was made at high speeds to determine the profile drag of a P-47D airplane wing having production surfaces covered with camouflage paint. The profile drag of a wing section somewhat outboard of the flap was determined by means of wake surveys in tests made over a range of airplane lift coefficients from 0.05 to 0.69 and airplane Mach numbers from 0.25 to 0.78.

The results of the tests indicated that a minimum profile-drag coefficient of 0.0097 was attained for lift coefficients from 0.16 to 0.25 at Mach numbers less than 0.67. Below the Mach number at which compressibility shock occurred, variations in Mach number of as much as 0.2 appeared to have no effect on profile-drag coefficient. The variation in Reynolds number corresponding to this variation in Mach number, however, was appreciable and may have had some effect on the results obtained. Comparison of the Mach number at which shock losses were first evident in the wake with the critical Mach number indicated that shock was not evident until the critical Mach number was exceeded by at least 0.025.

INTRODUCTION

A flight investigation was made to determine the profile-drag characteristics of a P-47D airplane

wing with various surface finishes. Two phases of this investigation were reported in references 1 and 2, and the third and last phase is reported herein. In reference 1 results were reported of tests made to determine boundary-layer-transition locations and profile drag of a wing section with faired and smoothed surfaces. In reference 2 results were reported of tests made to determine the effect of surface roughness on the profile drag of the faired surfaces with transition fixed far forward. The results reported herein are of tests made to determine the profile drag of a wing section having unfaired production surfaces covered with camouflage paint. The present tests and those of references 1 and 2 included Mach numbers through the critical values; in the present tests, however, the Mach number range was extended to somewhat higher supercritical values than those of references 1 and 2.

Profile drag was determined by means of wake surveys. The tests were made for conditions in which airplane lift coefficients from 0.06 to 0.69, Reynolds numbers from 8.4×10^6 to 23.1×10^6 , and Mach numbers from 0.25 to 0.78 were obtained.

APPARATUS AND TESTS

The investigation was conducted on a right wing section of a P-47D airplane (fig. 1). This wing section, a Republic S-3 section, had a chord of 86.05 inches, a thickness of 11 percent of the chord, and was located at 63 percent of the semispan from the plane of symmetry, or about 2 feet outboard of the flap. At this spanwise station the test section included the aileron but was outboard of the propeller slipstream, the gun ports in the leading edge, and the shell ejector slots in the lower surface. The measured ordinates of the test section are given in fractions of the chord in table I. The Republic S-3 section tested has pressure-distribution characteristics similar to those of the NACA 23011 airfoil.

The surfaces of the test section were prepared by covering the production surfaces with one coat of zinc chromate primer, one coat of gray surfacer, and two coats of olive-drab camouflage paint. Measurements of surface roughness made by means of a shop microscope (described in reference 2) indicated that the surface roughness con-

CONFIDENTIAL

sisted of particles of about 0.0012 inch in height and numbering roughly 10,000 per square inch.

An indication of surface waviness was obtained by means of a curvature gage (fig. 2) with legs spaced 4 percent of the test section chord. The waviness condition of the unfaired and roughened production surfaces and also of the faired and smoothed surfaces of reference 1 is indicated in figure 4 by the plot of the waviness index d/c against s/c , where d is the deflection of the curvature gage, s is the distance along the surface from the leading edge, and c is the test section chord.

Profile-drag measurements were made with a wake-survey rake (fig. 3) located 19 percent of the chord behind the trailing edge of the test section. The rake was the same as that used in references 1 and 2 except that two tubes spaced four inches were added to each end of the rake (making a total width of 23.9 inches) in order to permit a survey of more of the wake at supercritical speeds than in references 1 and 2. Wake total and static pressures, free-stream impact pressure, and the position of the right aileron were measured with NACA recording instruments. The section profile-drag coefficients c_{d0} were determined by the integrating method of reference 3; that is, the total-pressure loss was integrated across the wake and then multiplied by factors depending on free-stream impact pressure, maximum total-pressure loss, static pressure in the wake, and flight Mach number.

The tests were made in level flight, dives, and turns at 20,000 feet and over a range of calibrated airspeeds from 150 to 415 miles per hour. The airplane lift coefficient C_L obtained in the tests ranged from 0.06 to 0.69, the Reynolds number R from 3.4×10^6 to 23.1×10^6 and the Mach number M from 0.25 to 0.73.

RESULTS AND DISCUSSION

The investigation of flow conditions indicated by surface tufts located over a portion of the upper surface of the P-47D airplane wing, reported in reference 4, showed that somewhat inboard of the test section, at 63 percent semispan, cross flow was present at Mach numbers greater than 0.70 at a lift coefficient of 0.40 and

CONFIDENTIAL

greater than 0.76 at a lift coefficient of 0.15. Because of this flow condition and the fact that the wake at Mach numbers greater than 0.66 at a lift coefficient of 0.40 and greater than 0.72 at a lift coefficient of 0.15 extended beyond the limits of the wake-survey rake, the wake surveys for these flight conditions were not evaluated.

Profile-drag coefficients selected for several lift coefficients for which the data were most complete are plotted against Mach number in figure 5. The corresponding Reynolds numbers are plotted above the profile-drag curves.

Figure 5 shows that the profile-drag coefficient decreased with lift coefficient and attained a minimum value of 0.0097 over a range of lift coefficients from at least 0.16 to 0.25 at Mach numbers below 0.67. The minimum value of the profile-drag coefficient of the faired and smoothed surfaces reported in reference 1 was 0.0062. At Mach numbers below that at which compressibility shock was evident, as indicated by the rapid increase in profile-drag coefficient, variation in Mach number of as much as 0.2 appeared to have no effect on the profile-drag coefficient. This variation in Mach number, however, was accompanied by an appreciable variation in Reynolds number, which may have had some effect on the results obtained. In the tests of references 1 and 2 variations in Mach number of as much as 0.16, with negligible variation in Reynolds number, had no effect on the profile-drag coefficient for the wing section with smooth surfaces and for the wing section with smooth and rough surfaces with transition fixed far forward.

The flight Mach number and airplane lift coefficient at which compressibility shock losses became evident in the wake are shown by figure 6. The rapidly increasing width of wake with Mach number is shown in figure 7 as an indication of the presence of compressibility shock losses in the wake. In this figure the total-pressure loss across the wake is presented for several Mach numbers at a lift coefficient of about 0.16 as a plot of $\Delta H/q_c$ against y/c , where ΔH is the loss in total pressure at position y in the wake, q_c is the free-stream impact pressure, and c is the chord of the wing section. (Position $y/c = 0$ corresponds to the top tube of the rake.) Wake profiles for Mach numbers 0.64 and 0.67 showed no evidence of shock, but profiles for Mach numbers 0.68, 0.70, and 0.78 indicated shock of increasing intensity on the upper surface.

CONFIDENTIAL

In figure 6 the demarcation of flight conditions with respect to the presence or absence of shock losses in the wake is well defined. At lift coefficients of 0.10 and 0.50, shock was first indicated at Mach numbers 0.69 and 0.62, respectively. The first indications of shock in the wake as shown by figure 6 correspond to the beginning of the rapid increase in profile-drag coefficients in figure 5.

The critical Mach number for the wing section having production surfaces covered with camouflage paint was not determined. The critical Mach number, for the corresponding left wing section with faired and smoothed surfaces, however, was determined in tests reported in reference 1. This critical Mach number, shown plotted in figure 6, may be as much as 0.03 too high for the present tests because of the method of measuring the chordwise pressure distribution and because the left aileron was deflected upward about 3° and the right aileron was deflected downward about 1° . Comparison of the Mach number at which shock was first evident in the wake with this critical Mach number indicates that shock losses were not evident in the wake until the critical Mach number was exceeded by at least 0.025. A similar result was obtained in references 1 and 2 except that, in reference 1 for the faired and smooth wing section, the critical Mach number was exceeded by at least 0.04. The appearance of shock in the wake of the unfaired and roughened production surfaces at a lower Mach number than for the faired and smooth surfaces may be associated with a lower critical Mach number for the unfaired and roughened production surfaces than for the faired and smooth surfaces.

CONCLUSIONS

The flight investigation of the profile drag of a P-47D airplane wing having production surfaces covered with camouflage paint indicated the following results:

1. A minimum profile-drag coefficient of 0.0097 was attained for airplane lift coefficients from 0.16 to 0.25 at Mach numbers below 0.67.

2. Below the Mach number at which compressibility shock was evident, as indicated by rapid rise in profile-drag coefficient, variation in Mach number of as much as

CONFIDENTIAL

0.2 appeared to have no effect on profile-drag coefficient. The variation in Reynolds number that corresponded to this variation in Mach number was appreciable and may have had some effect on the results obtained.

3. Comparison of the Mach number at which shock losses were first evident in the wake with the critical Mach number of the wing section with faired and smooth surfaces indicated that compressibility shock losses were not evident until the critical Mach number was exceeded by at least 0.025.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.

REFERENCES

1. Zaloveik, John A.: Flight Investigation of Boundary-Layer and Profile-Drag Characteristics of Smooth Wing Sections of a P-47D Airplane. NACA ACR No. L5K11a, 1945.
2. Zaloveik, John A., and Wood, Clotaire: A Flight Investigation of the Effect of Surface Roughness on Wing Profile Drag with Transition Fixed. NACA ARR No. L4L25, 1944.
3. Silverstein, A., and Katzoff, S.: A Simplified Method for Determining Wing Profile Drag in Flight. Jour. Aero. Sci., vol. 7, no. 7, May 1940, pp. 295-301.
4. Wood, Clotaire, and Zaloveik, John A.: Flight Investigation at High Speeds of Flow Conditions over an Airplane Wing as Indicated by Surface Tufts. NACA CB No. L5E22, 1945.

CONFIDENTIAL

TABLE I
ORDINATES OF REPUBLIC S-3 WING SECTION TESTED
ON P-47D AIRPLANE

[All values given in fractions of chord;
ordinates measured relative to an arbitrary chord and with inboard trailing edge of aileron in line with trailing edge of flap]

Station	Ordinate	
	Upper surface	Lower surface
0	0	0
.0125	.0192	-.0095
.0250	.0310	-.0154
.0500	.0444	-.0184
.0750	.0555	-.0221
.10	.0604	-.0255
.15	.0670	-.0300
.20	.0736	-.0354
.25	.0711	-.0381
.30	.0705	-.0395
.35	.0685	-.0400
.40	.0655	-.0395
.45	.0627	-.0378
.50	.0589	-.0356
.60	.0485	-.0256
.70	.0354	-.0221
.80	.0230	-.0146
.90	.0105	-.0060
1.00	0	0
L.E. radius: 0.0087		

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

CONFIDENTIAL

NACA ACR No. L6B21

Fig. 1

CONFIDENTIAL

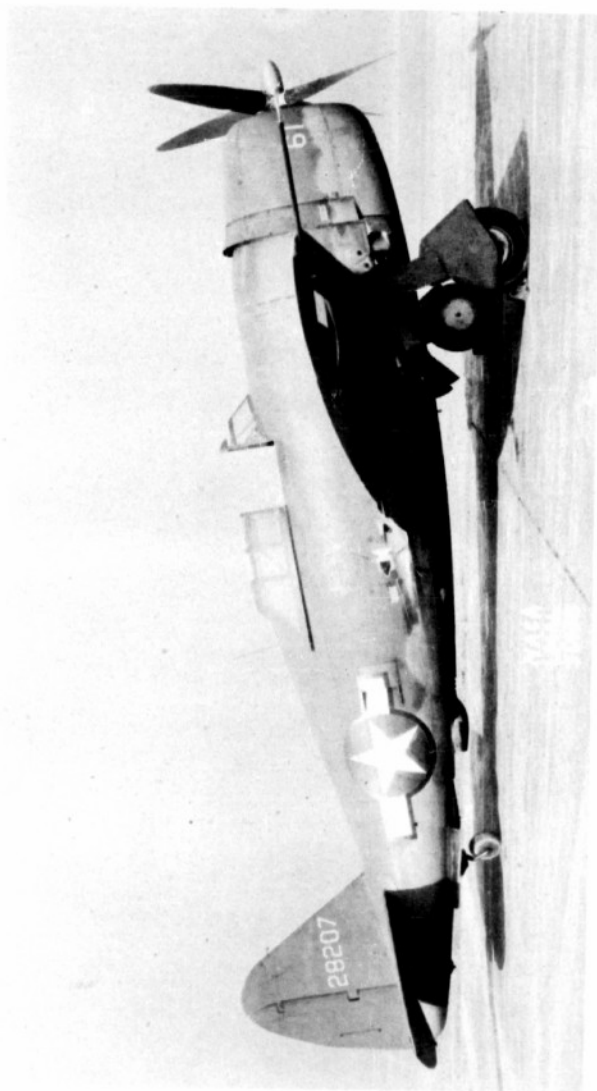


Figure 1.- P-47D airplane used for tests.

CONFIDENTIAL

8

NACA ACR No. L6B21

Fig. 2

CONFIDENTIAL

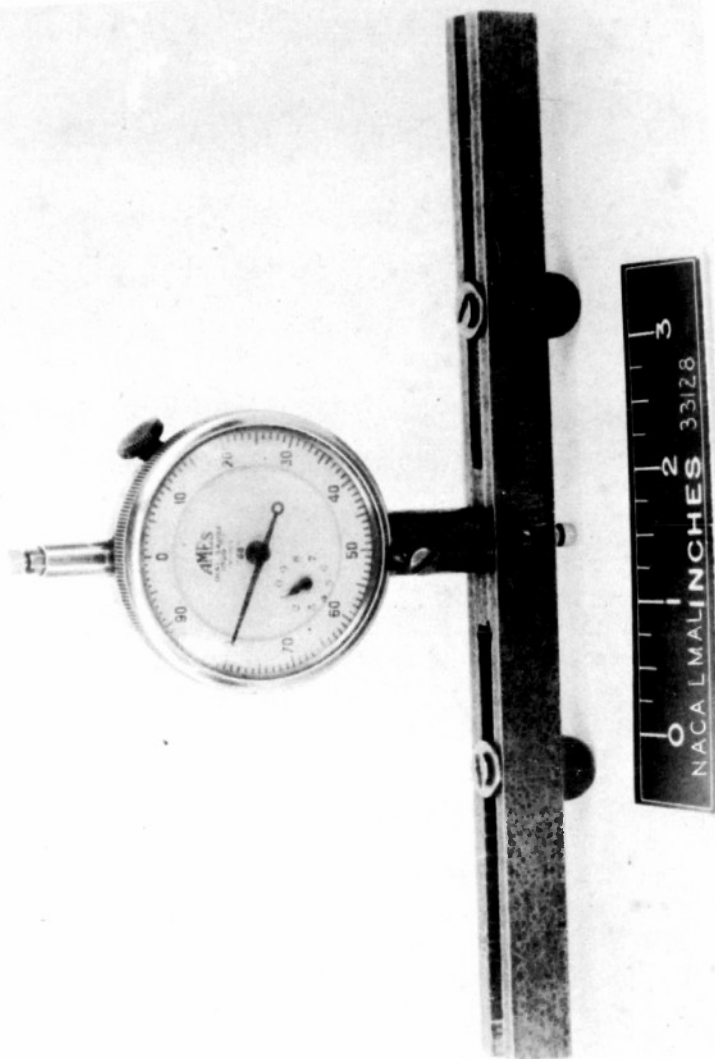


Figure 2.- Curvature gage used in measuring surface waviness.

CONFIDENTIAL

NACA ACR No. L6B21

Fig. 3

10

CONFIDENTIAL

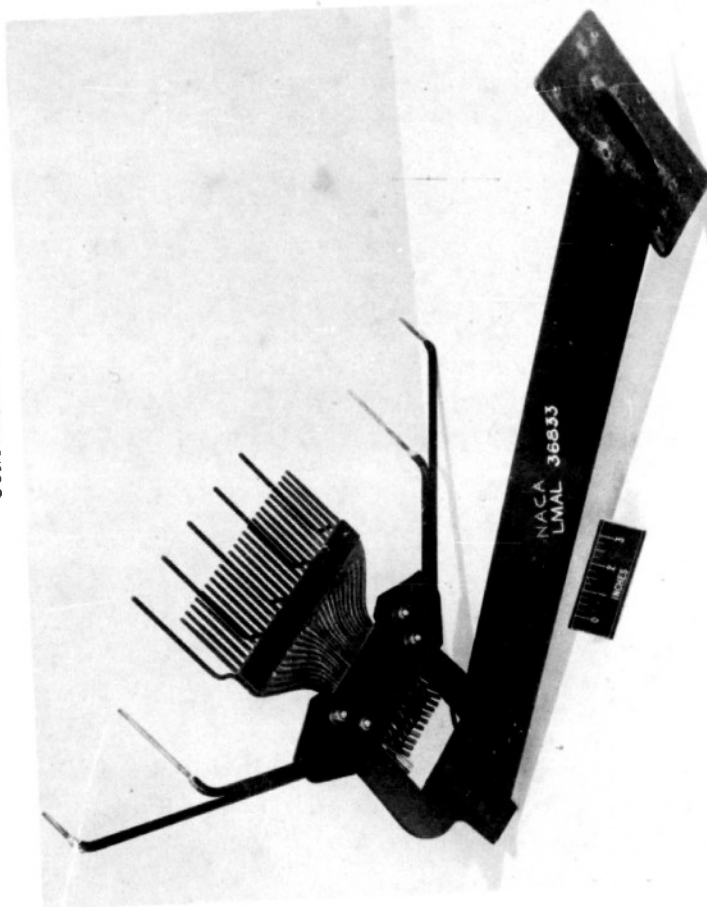


Figure 3.- Wake-survey rake. CONFIDENTIAL

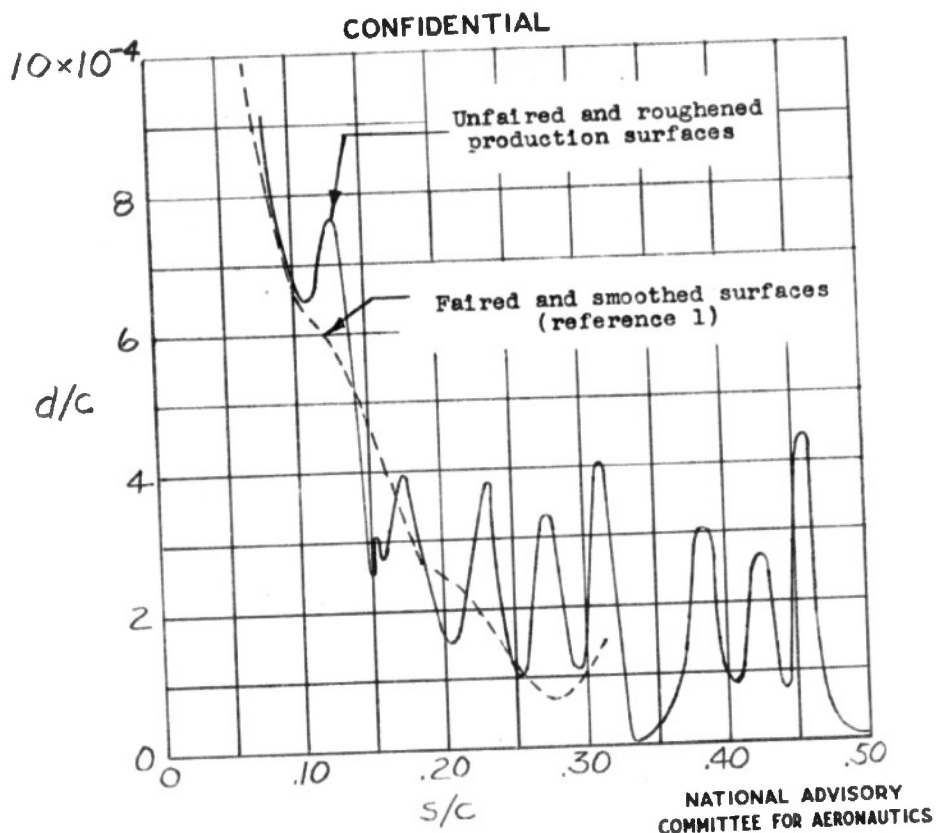


Figure 4.- Surface-waviness index of unfaired and roughened production surfaces and of faired and smoothed surfaces.


CONFIDENTIAL

Fig. 5


NACA ACR No. L6B21

CONFIDENTIAL

C_L
 —○— 0.16
 —+— .25
 —x— .33
 —□— .40

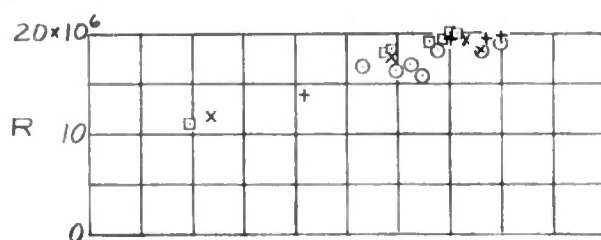

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

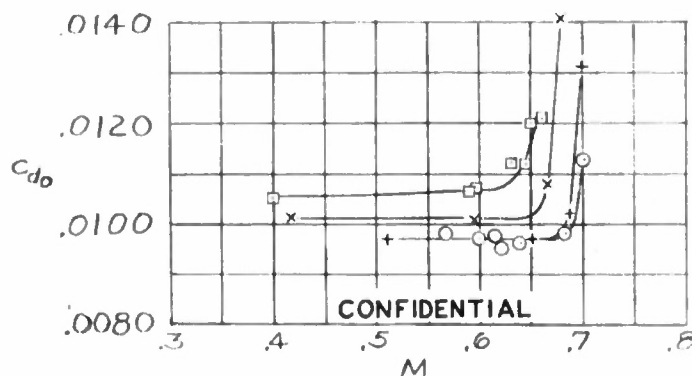

CONFIDENTIAL

Figure 5.- Profile-drag coefficient of P-47D wing section having production surfaces covered with camouflage paint. Reynolds number is plotted above drag curves.

CONFIDENTIAL

- No evidence of shock in wake
- + Evidence of shock in wake
- First indication of shock in wake
- Critical Mach number for section with faired and smoothed surfaces (reference 1)

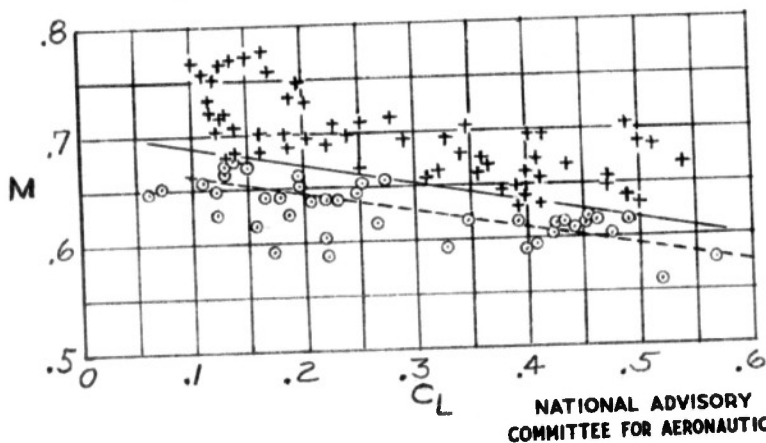


Figure 6.- Variation with airplane lift coefficient of critical Mach number and Mach number at which shock became evident in wake.

CONFIDENTIAL

Fig. 7

NACA ACR No. L6B21

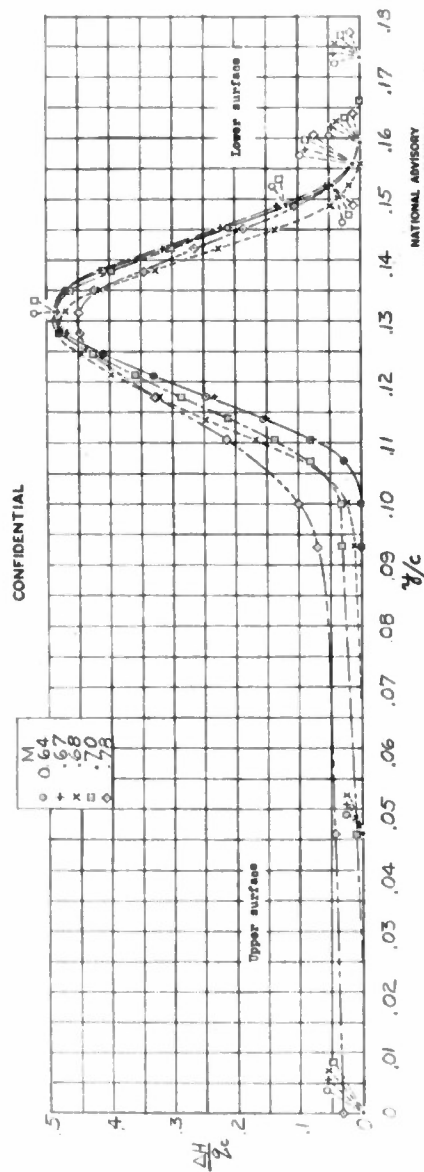


Figure 7.- Wake profiles at an airplane lift coefficient of 0.16 for several Mach numbers. (Position $\frac{y}{c} = 0$ corresponds to top tube in wake-survey plane.)

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

REEL - C

151

A.T.I.

6477

P111 * Aerodynamic Lift

FORM 100 (13 MAR 47)

Zalovick, John
Daum, Fred L.

DIVISION: Aerodynamics (2)
SECTION: Wings and Airfoils (6) 9-7
CROSS REFERENCES: Pressure distribution - Wings (74500);
Wings - Lift distribution (99170); Drag, Aerodynamic
- Profile (31220)

ATI- 6477

ORIG. AGENCY NUMBER
ACR-L6B21

REVISION

AUTHOR(S)

AMER. TITLE: Flight investigation at high speeds of profile drag of wing of a P-47D airplane having production surfaces covered with camouflage paint

FORG'N. TITLE:

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Mar'46	14	8	photos, tables, graphs

ABSTRACT

Wing section outboard of flap was tested by wake surveys in Mach range of 0.25 - 0.78 and lift coefficient range of 0.06 - 0.69. Results indicated that minimum profile-drag coefficient of 0.0097 was attained for lift coefficients from 0.16 to 0.25 at Mach less than 0.67. Below Mach number at which compressibility shock occurred, variations in Mach of 0.2 had negligible effect on profile drag coefficient. Shock was not evident until critical Mach was exceeded by 0.025.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A., Washington, D. C.

UNCLASSIFIED PER AUTHORITY: INDEX
OF NACA TECHNICAL PUBLICATIONS
DATED 31 DECEMBER 1947.

REPORT (R) (M) (N)

Zalevick, John
Dunn, Fred L.

DIVISION: Aerodynamics (2)
SECTION: Wings and Airfoils (6)
CROSS REFERENCES: Pressure distribution - Wing (74500);
Wings - Lift distribution (99170); Drag, Aerodynamic
- Profile (31220)

ATI- 6577

ORIG. AGENCY NUMBER
ACR-16B21

REVISION

AUTHOR(S)

AMER. TITLE: Flight investigation at high speeds of profile drag of wing of a P-47D airplane
having production surfaces covered with camouflage paint

FORG'N. TITLE:

ORIGINATING AGENCY: National Advisory Committee for Aeronautics, Washington, D. C.

TRANSLATION:

COUNTRY	LANGUAGE	FORG'N. CLASS.	U. S. CLASS.	DATE	PAGES	ILLUS.	FEATURES
U.S.	Eng.		Unclass.	Mar'46	14	8	photos, tables, graphs

ABSTRACT

Wing section outboard of flap was tested by wake surveys in Mach range of 0.25 - 0.78 and lift coefficient range of 0.06 - 0.69. Results indicated that minimum profile-drag coefficient of 0.0097 was attained for lift coefficients from 0.16 to 0.25 at Mach less than 0.67. Below Mach number at which compressibility shock occurred, variations in Mach of 0.2 had negligible effect on profile drag coefficient. Shock was not evident until critical Mach was exceeded by 0.025.

NOTE: Requests for copies of this report must be addressed to: N.A.C.A.,
Washington, D. C.

1-2 HQ, AIR MATERIEL COMMAND

AIR TECHNICAL INDEX

WRIGHT FIELD, OHIO, USAAF

17-0-11 CAN OF 100